

SPEAKER SELECTOR & PAGING MICROPHONE


SPEAKER SELECTOR (9 stations and All-Call)

WK-320N



- When you need speaker area selection for the Hi-Power Amplifier Series, this optional 9-station speaker selector (with built-in monitor speaker) is available.

Major Operating Controls

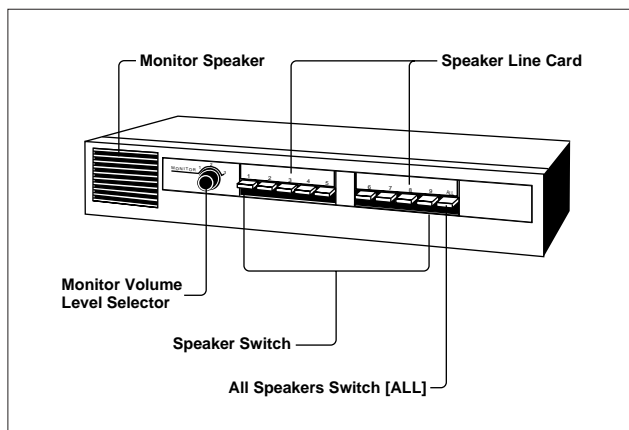

SPECIFICATIONS

Stations	9 stations +all call
Monitor Speaker	Output 0.5 w with attenuater (4 steps)
Maximum input for 1 station	360 W
Total Maximum input	360 W
Dimensions	420(W) x 68(H) x 175(D) mm
Weight (Approx.)	2.2 kg

PAGING MICROPHONE (With 2 Tone Chime)

WR-150NL (AC 110/120V) WR-150NH (AC 220/240V)



- This microphone plays an important role in an easy-to-use paging system. It has a built-in calling chime (2 tone).
- Can be switched to either press-to-talk or locked, and is designed for soft finger-tip manipulation.

* Remote power ON-OFF switching of the amplifier cannot be made with the WR-150NL/NH.

SPECIFICATIONS

Model No.	WR-150NL/NH (Chime Provided)	
Power Source	WR-150NL: 110 to 120 V AC, 50/60 Hz WR-150NH: 220 to 240 V AC, 50/60 Hz	
Power Consumption	1 W	
Frequency Response	50 to 15,000 Hz \pm 6 dB	
Signal to Noise Ratio	50 dB	
Microphone Input	-52 dB 600 Ω (unbalanced)	
Call Sign Output	-30 dB 10 k Ω (unbalanced) (880 Hz, 700 Hz, 2-tone signal)	
Output	-22 dB 10 k Ω (unbalanced)	
Dimensions	111(W) x 395.5(H) (including microphone) x 161(D) mm	
Weight (Approx.)	840 g (including microphone)	
Finish	Panel	Aluminum, Night black
	Case	ABS resin, Metallic gray painting