
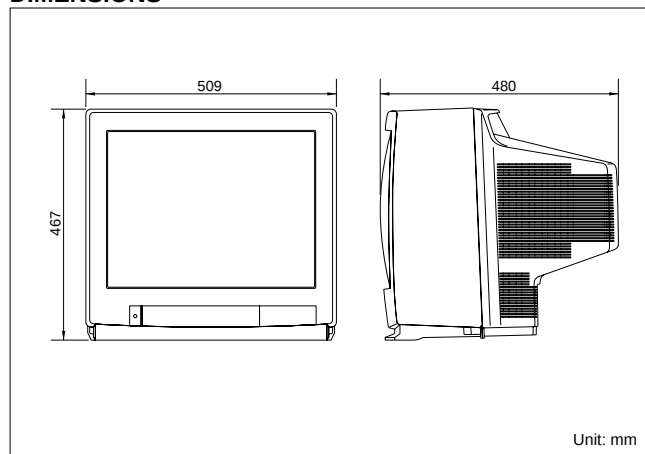


55cm CRT Colour AV Monitor

WV-CK2020

- 55cm diagonal CRT size.
51cm diagonal actual visual size.
- H.resolution of 500 TV lines.
- Looping through BNC connectors for video input and output.
- Looping through RCA connectors for audio input and output.
- Maximum 0.7 W for speaker output.


DIMENSIONS

Unit: mm


SPECIFICATIONS

Power Source	220 - 240 V AC, 50Hz
Power Consumption	66 W (Approx.)
Input / Output	Video (Input: 1 / Output: 1): 1.0 V [p-p] composite / 75 Ω or Hi-Z looping through Audio--RCA; 1 Input / 1 Output
TV System	PAL
Horizontal Resolution	500 lines at centre
Maximum Video Gain	41 dB ± 3 dB
Sweep Linearity	Less than 5 %
Sweep Geometry	Less than 2 %
Overscanning	8 %
Actual Visual Size (Approx.)	51 cm diagonal
CRT Size (Approx.)	55 cm diagonal
19-type Rack-Mount	No
Ambient Operating Temperature	-10°C - +50°C
Ambient Operating Humidity	Less than 90 %
Speaker Output	0.7 W (-10 dB)
Dimensions (W x H x D)	509 x 467 x 480 mm
Weight	21 kg

37cm CRT Colour AV Monitor

WV-CK1420

- 37cm diagonal CRT size.
34cm diagonal actual visual size.
- H.resolution of 330 TV lines.
- Looping through BNC connectors for video input and output.
- Looping through RCA connectors for audio input and output.
- Maximum 0.7 W for speaker output.

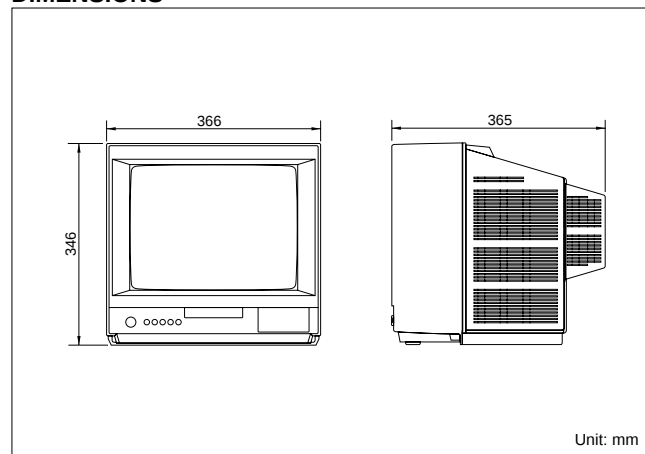DIMENSIONS

Unit: mm

SPECIFICATIONS

Power Source	220 - 240 V AC, 50Hz
Power Consumption	80 W (Approx.)
Input / Output	Video (Input: 1 / Output: 1): 1.0 V [p-p] composite / 75 Ω or Hi-Z looping through Audio--RCA; 1 Input / 1 Output
TV System	PAL
Horizontal Resolution	330 lines at centre
Maximum Video Gain	40 dB ± 3 dB
Sweep Linearity	Less than 5 %
Sweep Geometry	Less than 2 %
Overscanning	8 %
Actual Visual Size (Approx.)	34 cm diagonal
CRT Size (Approx.)	37 cm diagonal
19-type Rack-Mount	No
Ambient Operating Temperature	-10°C - +50°C
Ambient Operating Humidity	Less than 90 %
Speaker Output	0.7 W (-10 dB)
Dimensions (W x H x D)	366 x 346 x 365 mm
Weight	9.6 kg